



Perennial Plank

LUXURY VINYL PLANK





World of Flooring's Luxury Vinyl Plank & Tile collection offers a waterproof, durable, solution to all flooring problems at all budgets. The Perennial Plank lives up to its name, it's enduring and ever occurring. With hand scraped texture and a painted V groove, this plank looks and feels like it was handcrafted for your enjoyment. With it's 20 mil wear layer and antimicrobial urethane with double UV coating finish this plank will fight the growth of mold and bacteria, resist scratches and scuffs, and will not fade over time.



by **SCS**certified.


STOCKING

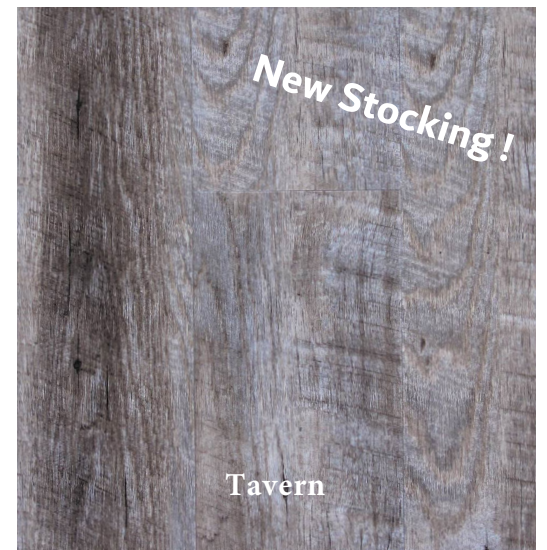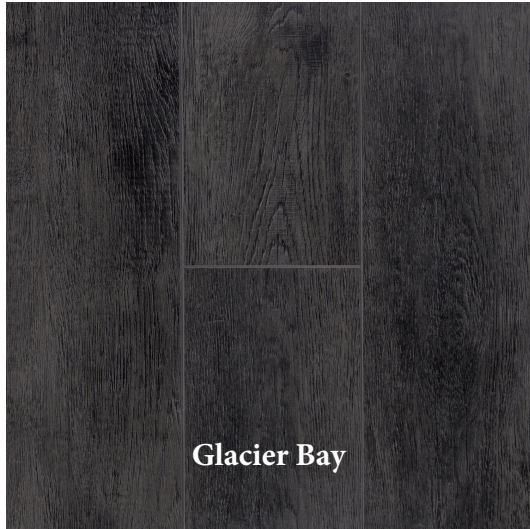

Benefits



SPECIAL ORDER

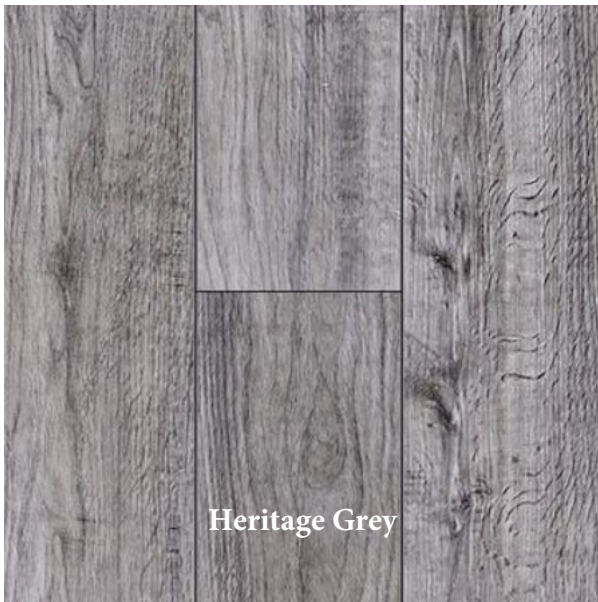

Benefits





Perennial Plank

Application

Perfect for any room, any level; residential and commercial alike.

- Kitchens
- Bedrooms
- Laundry Rooms
- Basements
- Foyers
- Offices
- Bathrooms
- Living Rooms

Installation Method

Direct Glue

Warranty

30 year Residential Warranty
10 Year Commercial Warranty

Product Information for Perennial Plank

Thickness.....	3mm
Plank Size.....	6" X 48"
Wear Layer.....	20 mil Commercial
Pieces per Carton.....	16 pieces
Square Footage per Carton.....	32 sf
Cartons per Pallet.....	48 cartons
Square Footage per Pallet.....	1,536 sf
Edge Description.....	V Grooved Painted Bevel
Finish.....	Urethane with Double UV Coating



Perennial Plank

PRODUCT SPECIFICATION SHEET

Style Name	Perennial Plank
Construction	High Performance LVT
Wear Layer Finish	Urethane with Double UV Coating
Wear Layer Thickness	20 mil
Overall Thickness	3mm
Installation	Direct Glue

FEATURES

Bevel	V Painted Groove
Texture	Hand Scraped
Vinyl Layer	100% Virgin, Phthalate Free

TESTING

Impact Sound Conduction / ASTM E492-09	No testing scheduled being its dry back
Slip Resistance / ASTM D 2047	>0.6
Dimensional Stability / ASTM F2199	Passes, Less than 0.020"/ft.
Residual Indentation / ASTM F1914	Passes
Static Load limit / ASTM F970	Passes
Flexibility / ASTM F 137	Passes, 6mm Mandrel
Resistance to Heat / ASTM F 1514	Passes
Resistance to Light / ASTM 1515	Passes
Resistance to Chemicals / ASTM F 925	5 min = Passes, 24 hr = Passes
Radiant Flux / ASTM 648	>0.45 watts/cm ² , NFPA Class I
Smoke Density / ASTM E 662	Passes, <450

WARRANTY

30 Year Residential
10 Year Commercial

ENVIRONMENTAL

Indoor Air Quality	FloorScore© certified
--------------------	-----------------------

BETTER PRODUCT

BETTER VALUE

BETTER SOLUTIONS